

Spring Tensioned Bird-Wire


Bird Solutions International
P.O. Box 927
Vista Ca, 92085
Phone 800-210-9514,
Phone: 760-758-9747
Fax 760-758-3969
Web: www.birdsolutions.com

CSI Division: 10296

Bird Solutions International's Spring Tensioned Bird-Wire

Supplier/Installer

Bird Solutions International distributes and installs Spring Tensioned Bird-Wire's extensive line of components from the finest stainless steel and ultra-violet stabilized plastics.

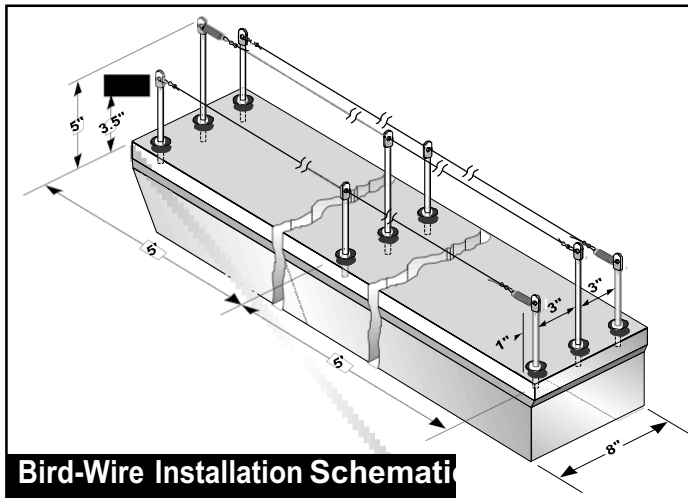

PR-Product Presentation

Bird Solutions International Bird-Wire system is used worldwide to deter pigeons and larger birds from roosting on exposed building ledges, parapets, window sills, pipes and roof peaks. The system features hard-to-see ultra violet protected, nylon coated stainless steel wire spring-tensioned between stainless steel posts.

Very Discreet

The advantages of Bird-Wire include its wide array of installation options, and the fact that it is extremely hard to see, even close up. It is the clear choice for high pedestrian, high-end structures like historic buildings, hotels, museums, shopping centers and residences.

Many Options and Configurations

Bird-Wire posts are available in various lengths and configurations, allowing for installation on literally any building situation. Special clamps allow for installation on pipes, rain gutters, skylights, roof peaks, narrow ledges, corners and literally any surface where pest birds are posing a problem. Stainless steel split pins can replace posts on window ledges where opposing walls face one another.

UA-Uses, Applications

Bird Barrier Bird-Wire can be used to deter a wide variety of birds (pigeons and larger) from landing on light to medium pressure (see "Bird Pressure" in company introduction) exposed ledges. The tensioned wires de-stabilize the landing platform, causing the birds to take their business elsewhere. The

Bird-Wire components can be used in combination to cover any width ledge. Bird-Wire is not recommended for swallows, sparrows or starlings. Bird-Wire requires knowledgeable installers, as the many attachments, springs and wires make up a product line which cannot just be pulled out of the box and mounted ready-to-go onto a surface.

AI-Assembly, Installation

Bird Solutions International Bird-Wire is run in long sections along the length of the ledge, pipe, gutter or other mounting surface. Bird Posts are mounted to the building by drilling in to the substrate, or by attaching stick-on bases with Bird Barrier Super Bond. The posts should be placed no more than 5 feet apart. Ledges of 1 to 2 inches wide require only one row of Bird-Wire. Wider ledges, however, will require a row every two and a half inches. A 9 inch ledge, for example, would require 3 rows for total protection.

MF-Materials, Finishes

All components of the Bird-Wire system are made from stainless steel or ultra-violet stabilized plastic. The wire itself is very thin braided stainless steel wire coated with a ultra-violet stabilized nylon coating.

TS-Technical Support

Bird Solutions International knowledgeable field representatives are available to assist in any aspect of evaluation, product recommendation and even local certified installation. Call 800-210-9514, or fax drawings and other pertinent information to 424-527-8005. Free literature, job evaluation worksheets and installation information is available.

SPECIFICATION GUIDELINES

General

1.1 Description

1.1.1 Install Bird Barrier Bird-Wire on exposed ledges where birds loaf but do not nest, to prevent loafing and damage from droppings.

1.2 Quality Assurance

1.2.1 Obtain technical literature from manufacturer or distributor, telephone consultation and plan/photograph evaluation.

1.2.2 Utilize certified installation companies in your area who are fully skilled with Bird Barrier products, and carry the proper insurance coverage.

1.2.3 Utilize labor recommended by Bird Barrier for especially challenging applications.

1.3 Submittals

1.3.1 Submit manufacturer's samples, catalog cuts, shop sketches and other descriptive material.

1.4 Product Handling

1.4.1 Protect Bird Barrier Bird-Wire from damage before, during and after installation.

1.4.2 If damage occurs to Bird Barrier Bird-Wire components, make all replacements immediately.

Products

2.1 Acceptable Manufacturer

2.1.1 Bird Barrier America, Inc., 20925 Chico Street, Carson, CA 90746. Phone 800-210-9514, Fax 424-527-8005

2.2 Model Designation

2.2.1 Bird-Wire Posts

2.2.2 Bird-Wire mounting systems

2.2.3 Bird-Wire stainless steel wire

2.2.4 Bird-Wire crimping tool and masonry drill bits

Material

Bird-Wire posts, springs, brackets, clamps

Material: 316 Stainless Steel

Height: Rods available 3.5", 4.5", 5.5", 6.5" and 8"

Bird-Wire: 325 ft, 975 ft, 1625 ft.

2.3 Mounting Systems

2.3.1 Concrete, stone or brick by drilling into substrate: Insert nylon anchor rivet into a hole 1" deep by 1/4". Bird-Wire post is hammered into this fitting.

2.3.2 Steel, sheet metal, or concrete, stone or brick with no holes in substrate: Use Bird-Wire stick-on bases and Bird Barrier Super Bond. Please experiment with the stick-on system before doing an entire job. The Bond is so powerful it has been known to pull up weaker substrates. Please follow Bond literature carefully.

2.3.3 Sheet metal with small holes: Use Bird-Wire stick-on bases and small self-tapping sheet metal screws through screw holes provided in base.

Execution

3.1 Examination

3.1.1 Examine installation area. Notify architect of detrimental work conditions.

3.1.2 Do not proceed until conditions are corrected.

3.2 Surface Preparation

3.2.1 Ledges and mounting surfaces must be clean, dry and free of peeling paint, rust, bird droppings or other debris. Bird droppings must be removed in a safe manner; large quantities should be removed and disposed of by reputable waste removal companies.

3.2.2 Remove or repair articles that may damage the Bird-Wire system after installation, such as tree limbs, brush, and loose parts of the building.

3.3 Installation

3.3.1 Install Bird-Wire as recommended in the installation instructions, which are supplied by the manufacturer. The first row of Bird-Wire shall nearly overhang the outer edge of the ledge. This can be accomplished by bending the outer post once it is inserted in the anchor rivet..

3.3.2 Bird-Wire shall cover the complete ledge, not just the outer perimeter. Bird-Wire shall extend to each corner. Bird-Wire is an anti-landing device, not a barrier. No more than 2.5" can be left between rows or wire, and no more than 5 feet can be left between posts lengthwise along the ledge.

3.3.3 Bird-Wire shall be installed in lengths of no more than 10' per section of wire. Every 10' there shall be a spring and termination of the wire section. The next 10' section simply continues from the same post.

3.4 Inspection

3.4.1 Visually inspect the Bird-Wire for loose wires or other problems related to poor installation or surface preparation.

3.4.2 Repair as necessary immediately.

OM-Operation, Maintenance

If the Bird-Wire is installed per our specifications, the product should be virtually maintenance free. Occasionally birds might drop debris in the wire in an attempt to build a nest, but the debris should be released by natural forces. Nest building is a characteristic of heavy-pressure sites (see introduction), and if the birds attempt to nest upon the Bird-Wire it was mis-specified and should be correctly specified with Bird Spikes, Electrified Bird Track

Hardware specifications

Birdwire - Birdwire 304 SS



Seven-stranded, stainless steel wire, coated with U.V.-stabilized clear nylon.

Birdwire system is perfect for pigeons or larger birds. Seven-stranded, stainless steel wire, coated with U.V.-stabilized clear nylon. Diameter is .7mm with a breaking strength of 100 lbs.

Birdwire - Birdwire Posts 3.5", 5" 304 SS



Flattened heads with a coined hole prevent chaffing of the Birdwire. The ends of the posts are chamfered for easy installation into the anchor rivets.

Birdwire Glue-On Bases



Base can be glued using Adhesive bond. They can also screw into properly prepared metal or wood. Set screw secures post.

Birdwire - Springs



Made from 304 grade stainless steel with one loop slightly open to facilitate attachment to the bird post or split pin.

Birdwire – Beam & Gutter Clamps



Install birdwire posts to an I-beam or other horizontal steel surface (up to 3/4" thick). 304 All stainless steel